



TRADITIONAL FIREPLACE INSTALLATION MANUAL

 EAGLE BAY[®]

Hardscapes for Easy Living™



Thank you for purchasing an Eagle Bay Fireplace. If you have any questions or need installation support, please contact our customer service line toll free at 1.800.321.9141.

WHAT YOU WILL NEED

- Adhesive (included)
- Work Gloves (included)
- Tape Measure
- Rubber Mallet
- Ladder (5 ft.)

PIECES INCLUDED IN KIT

**Please note — the dimensions listed below are approximate (have been rounded up / down) and may vary by a few fractions of an inch.*

DUBLIN BLOCKS

- A:** (259) Full Block, 4 x 8 x 12
(Full Block pieces (A) are not labeled. All other paver pieces are labeled with their corresponding letters.)
- B:** (32) 4 x 8 x 8
- C:** (14) 4 x 8 x 4
- D:** (2) L-shape Block, 8 x 9
- E:** (2) L-shape Block 8 x 12
- F:** (2) 4 x 8 x 10
- G:** (2) 4 x 4 x 12
- H:** (10) 4 x 8 x 5
- I:** (8) 4 x 8 x 9

ARCH LINTELS (unlabeled)

- (2) Arch Lintels

FIRE BRICKS (unlabeled tan colored bricks)

- (28) 4 x 9
- (6) 4 x 4
- (4) 2 x 9
- (2) 2 x 4
- (4) 4 x 8

STEEPLECREST CAPS

- (19) 14 x 12
- (6) 11.125 x 12 Cut Pieces #2
- (2) 8.75 x 12 Cut Pieces #3
- (2) 12 x 12 Cut Pieces #4
(Cut pieces will be marked)

PRODUCT USAGE / DISCLAIMER

COPINGSTONES: With kits that contain CopingStone, please see pages 18-19 for CopingStone item list and Courses 3, 12 and 22. CopingStones are available upon request. CopingStones are not included in standard kits.


This fireplace is designed to burn solid wood, plumbed propane or natural gas only. Gas log appliances must be approved for outdoor use. Please obtain the proper permits in your local jurisdiction and make sure to comply with all building codes. This fireplace is not designed to be used indoors or in any framed wooden structure. It should not be placed next to or on any combustible materials. Do not fill voids with insulation or any other materials. This fireplace is not intended to be used for cooking food. Eagle Bay recommends using a grate centered in Burning Box for optimum burning performance. Do not stack wood against block walls while burning. Be aware that sparks can escape and ignite combustible surroundings. Do not over pack with wood.

HELPFUL TIPS BEFORE YOU GET STARTED

- Have a tape measure handy at all times.
- Lay block left-to-right or back-to-front instead of outside-to-in. Laying block outside to in will make it difficult to place the inner blocks.
- When unloading the pallet, place the removed block at two to three feet from the pallet, leaving a clear path on all sides of the pallet. This will ensure easy access to the pallet at all times. **And if you want to make it extra easy on yourself, group alike blocks together for quick reference — A's together, B's together, etc.**
- If you are using CopingStone, be gentle. It's delicate and may break if handled too roughly.
- Make sure the letters on each block face a connecting block so they are hidden.
- Once each course has been placed, make sure you tighten it up by using a rubber mallet on the edges.
- Please contact our customer service team for questions and installation support. Toll Free: **1-800-321-9141**


COURSE 1

Lay Full Block units (A) as shown below. Square up your base so that it is 51.5 inches deep and 60 inches wide.

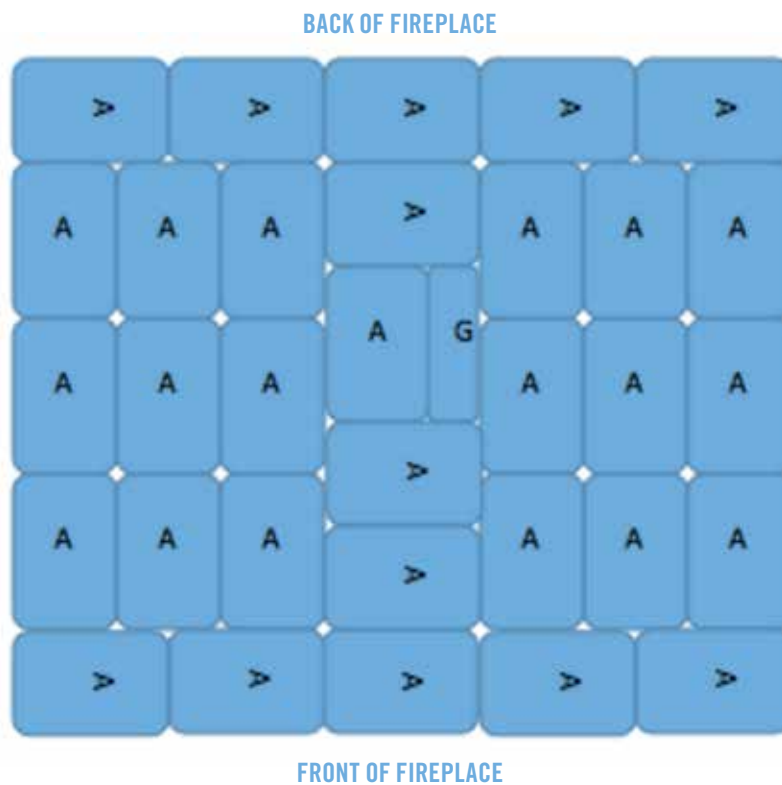


COURSE 2

Lay on top of C1 and make sure it is square to the base.

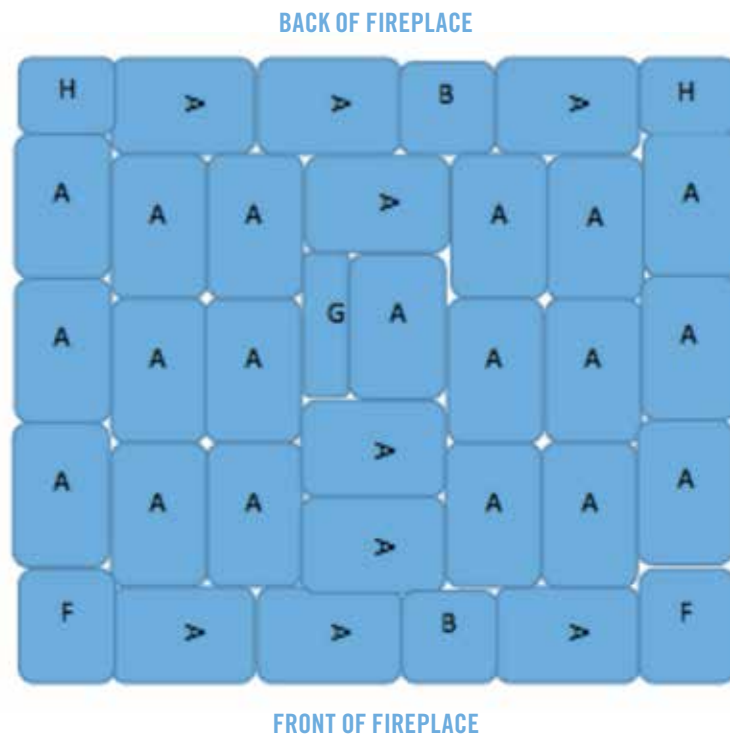

COURSE 3

For the next courses (3-9), lay block as shown below, starting in the top left corner (back left of base) making sure it is flush to the edges of the previous course. These courses will be one Full (A) Block inset from the front of the fireplace.

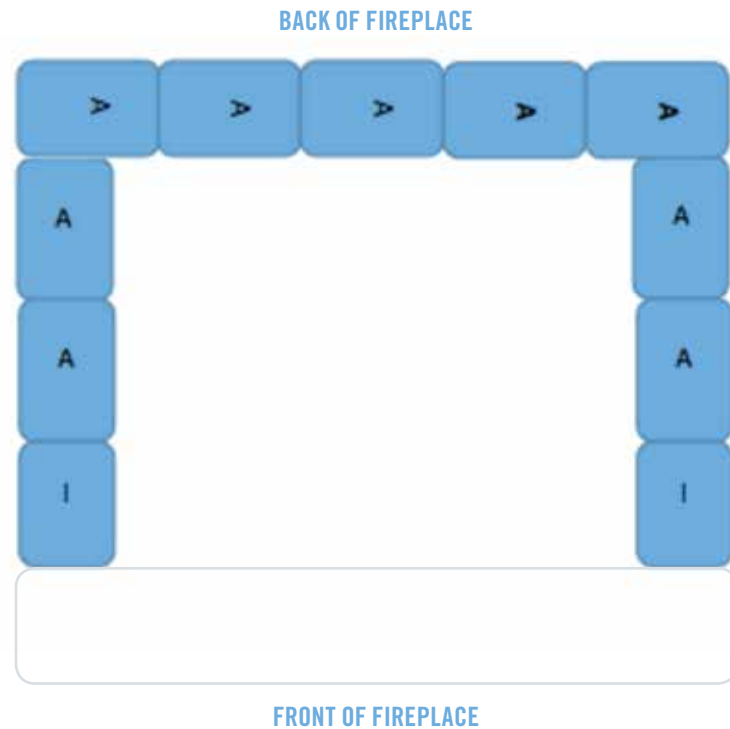


COURSE 3 (FIREBRICK)

Once the Course 3 block is placed, the Fire Brick and SteepleCrest Cap should be placed as shown below. This will allow you to tighten up the complete 3rd course (Block, Fire Brick, and SteepleCrest Cap) to ensure a tight fit before moving on to the 4th Course. It is recommended to lay all SteepleCrest Cap and Fire Brick to ensure proper placement before applying adhesive.

Follow the diagram below paying close attention to the various sizes of brick. Start by placing the brick in the back left corner, inside the "U". Once the Fire Brick has been placed, be sure to tighten up the all the edges of the block to remove any gaps / spaces in the Fire Brick.

BACK OF FIREPLACE

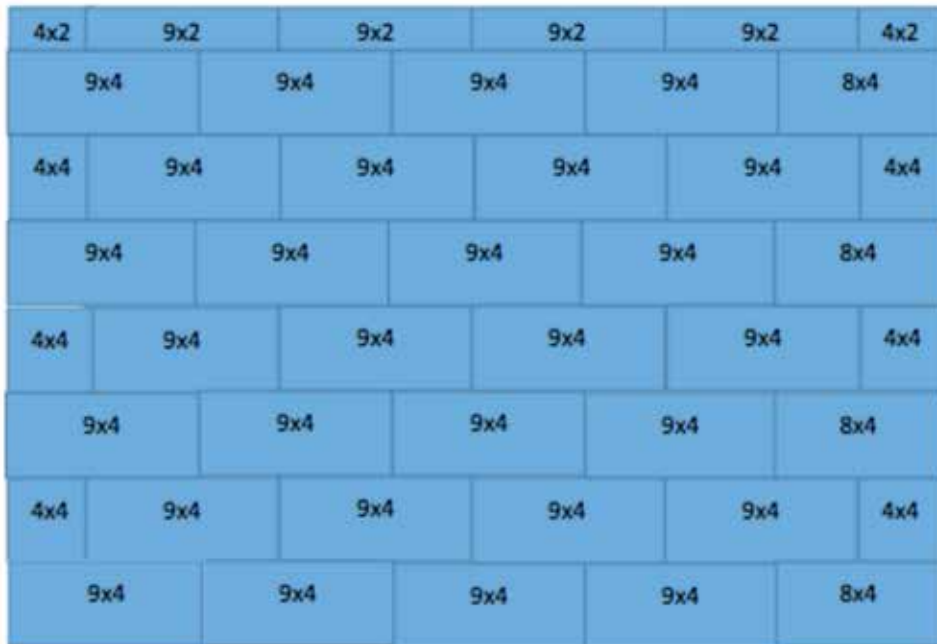

FRONT OF FIREPLACE

COURSE 3 (STEEPLECREST CAP)

***Please note** — See page 18 for CopingStone instructions.

Lay the SteepleCrest Cap in front of the Fire Brick as shown below. The overhang on the front of the fireplace should be about 2 inches. Adhesive is required on this course.

(3) 14 x 12 Full Pieces

(2) 11.125 x 12 Cut Pieces #2


BACK OF FIREPLACE



FRONT OF FIREPLACE




COURSE 4

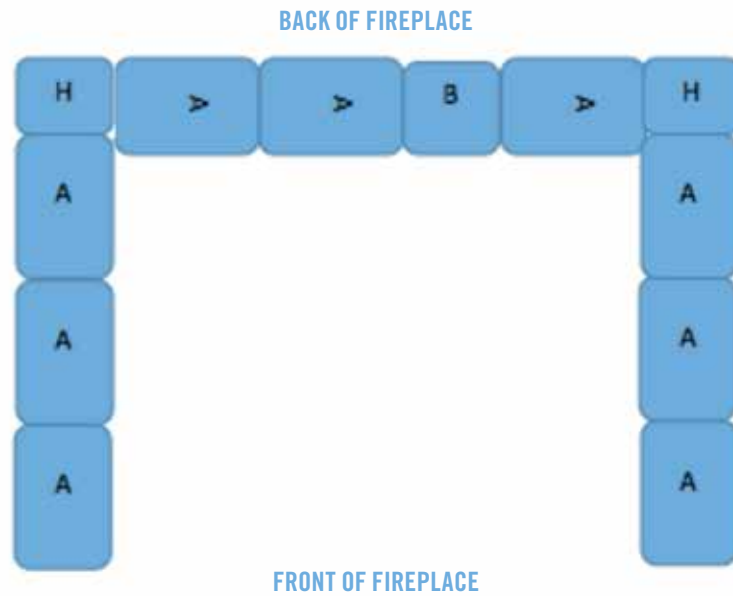


COURSE 5

Repeats Course 3

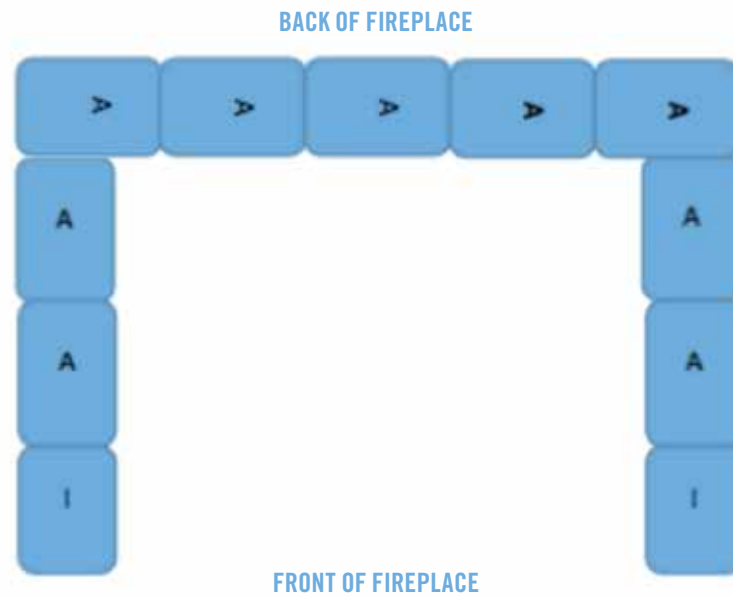


COURSE 6

Repeats Course 4

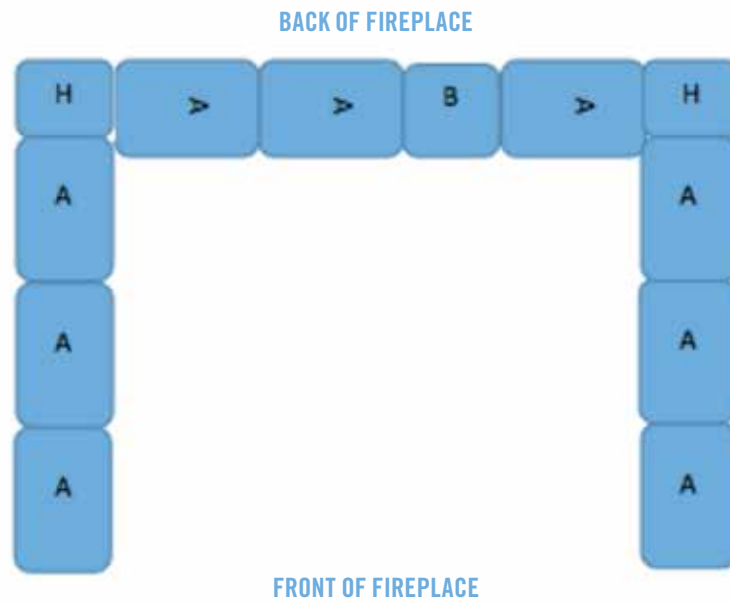


COURSE 7

Repeats Course 3

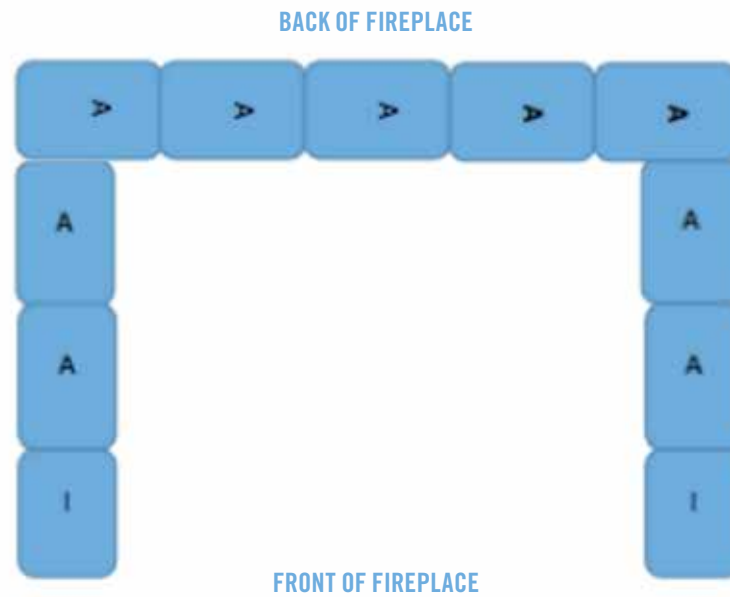


COURSE 8

Repeats Course 4

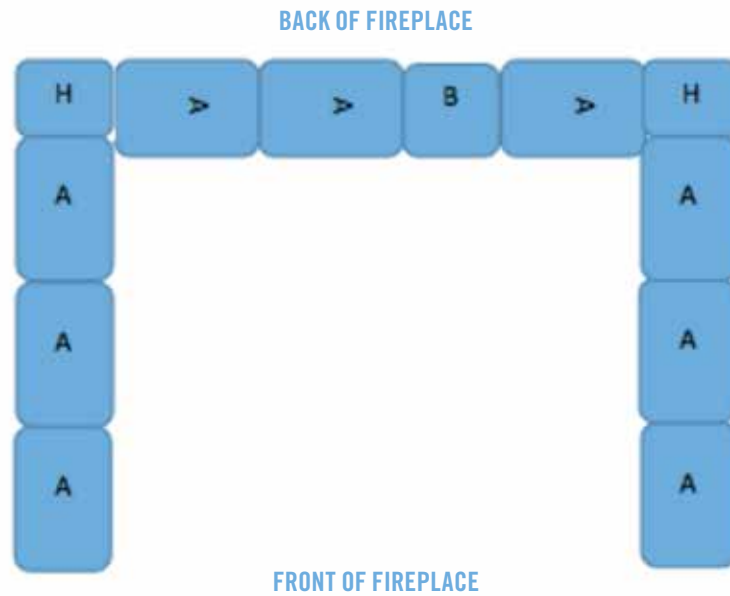


COURSE 9

Repeats Course 3

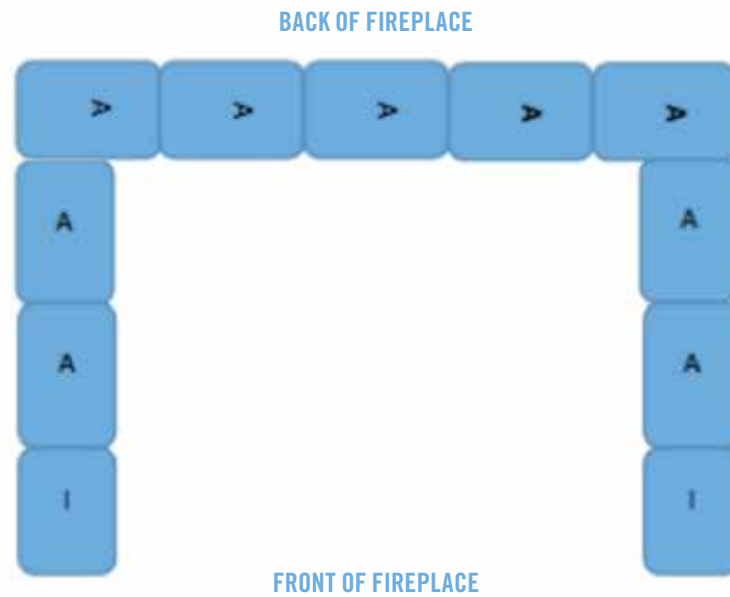


COURSE 10

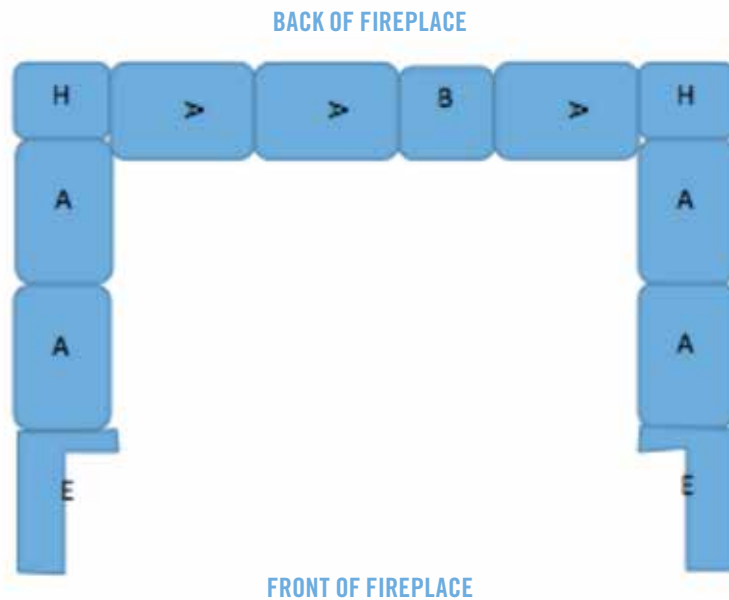

COURSE 11

After installing all the block in Course 10 and 11, install the two Arch Lintels. There are two sides to choose from on the Lintels (rough and smooth). Your preferred finish should be placed facing out.

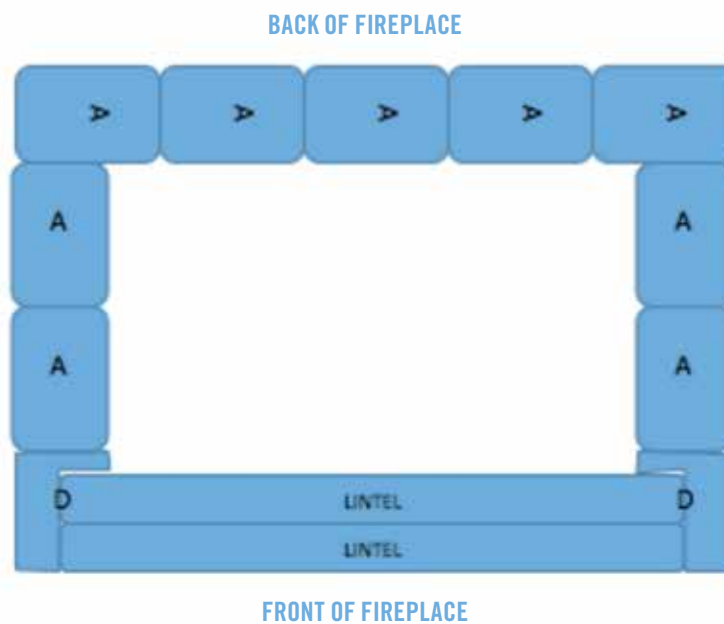


COURSE 12

***Please note** — See page 18 for CopingStone instructions.


Lay the SteepleCrest Cap as shown below. The overhang should be about 2 inches on all sides. It is recommended to lay all SteepleCrest Caps to ensure proper placement before applying adhesive. Adhesive is required on this course.

- (8) 14 x 12 Full Pieces
- (4) 11.125 x 12 Cut Pieces #2
- (2) 8.75 x 12 Cut Pieces #3

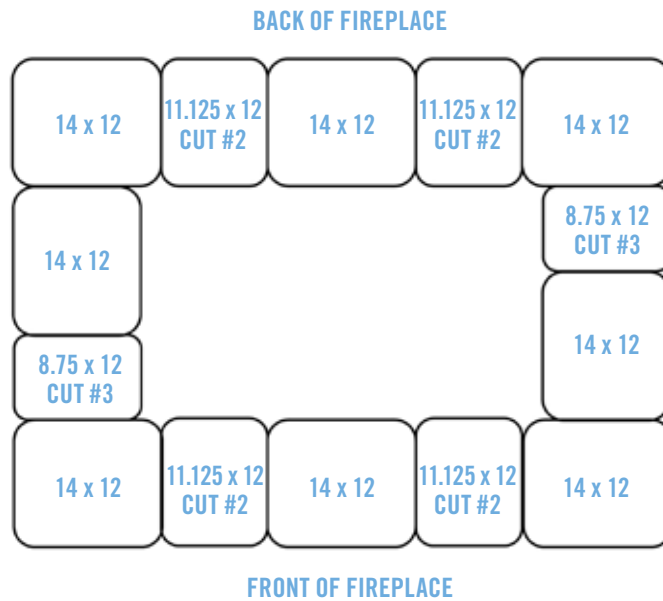


COURSE 13

Center on SteepleCrest Cap.

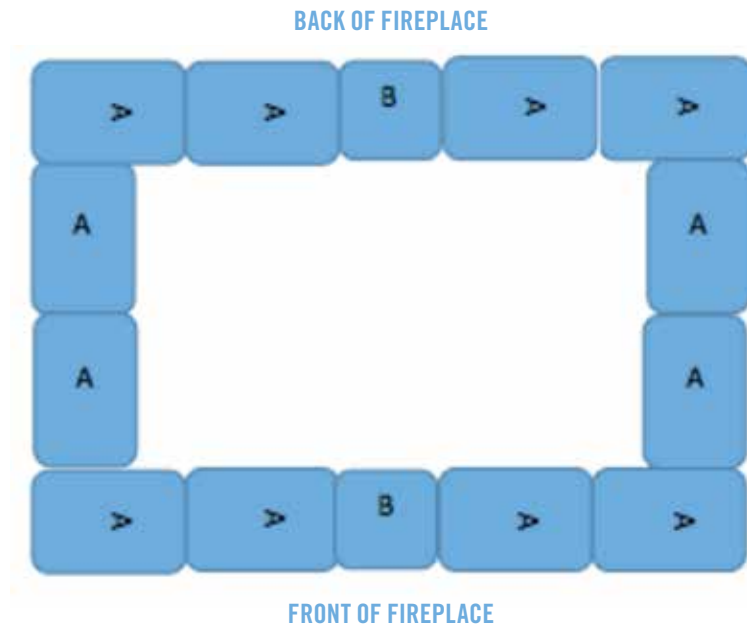


COURSE 14

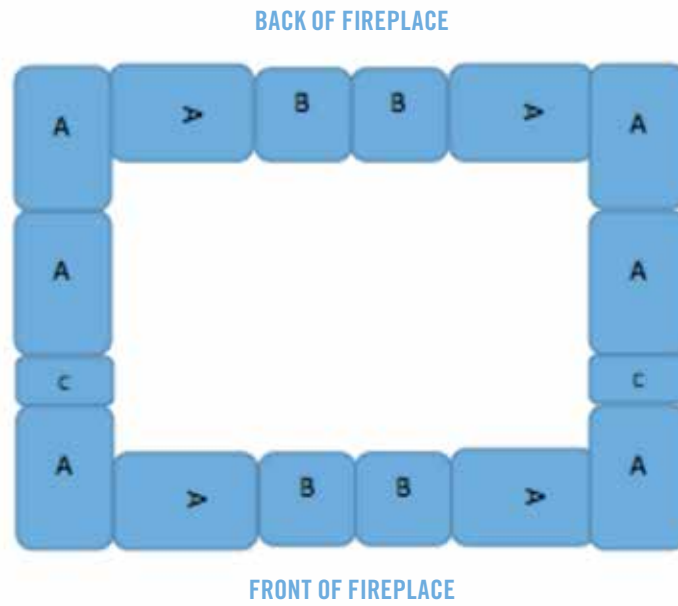


COURSE 15

Repeats Course 13

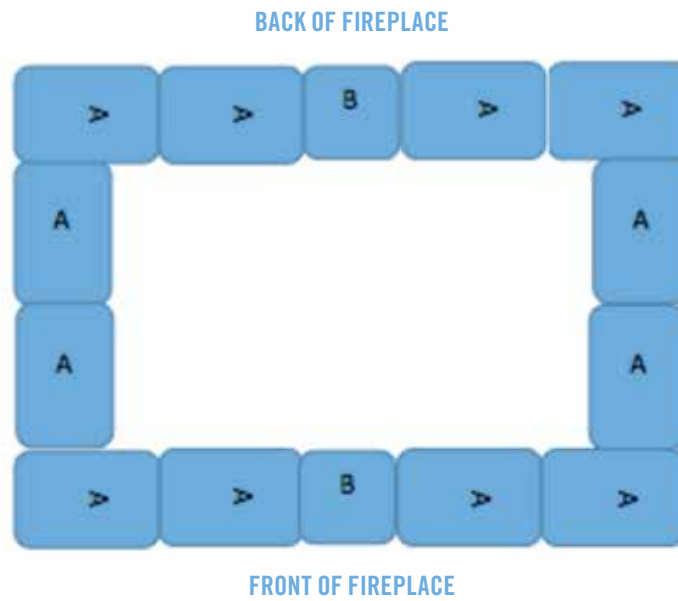


COURSE 16

Repeats Course 14

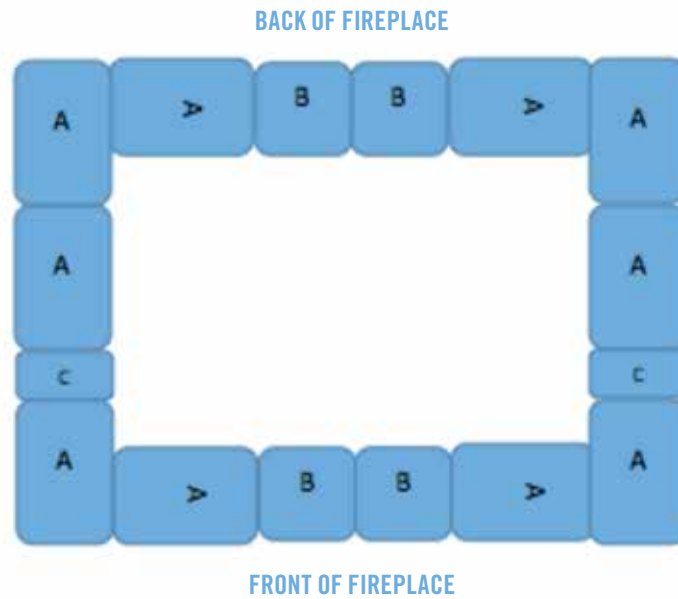


COURSE 17

This course will be smaller than the previous course. Center it on top of Course 16. This will create an overhang in the center. The overhang may be a bit unsteady and rock towards the center of the fireplace. To sturdy them while building, place a block on top to keep them stable. Course 17 will become fully stable once Course 18 is placed on top.

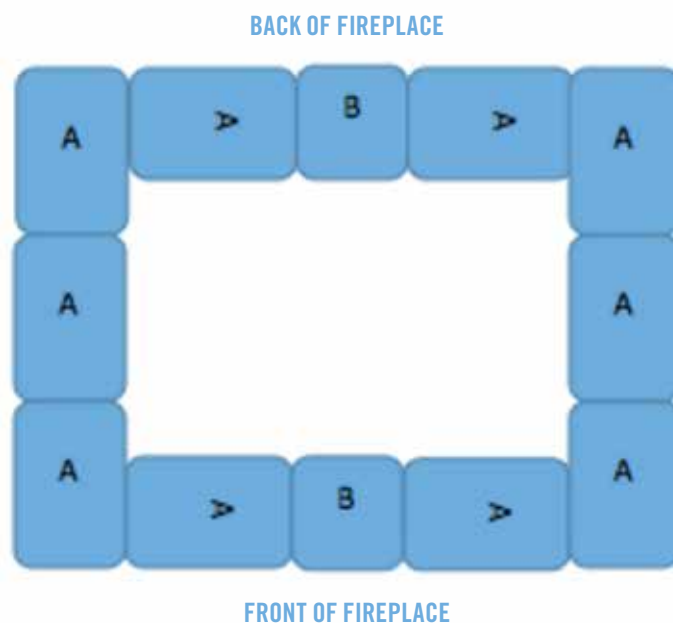


COURSE 18

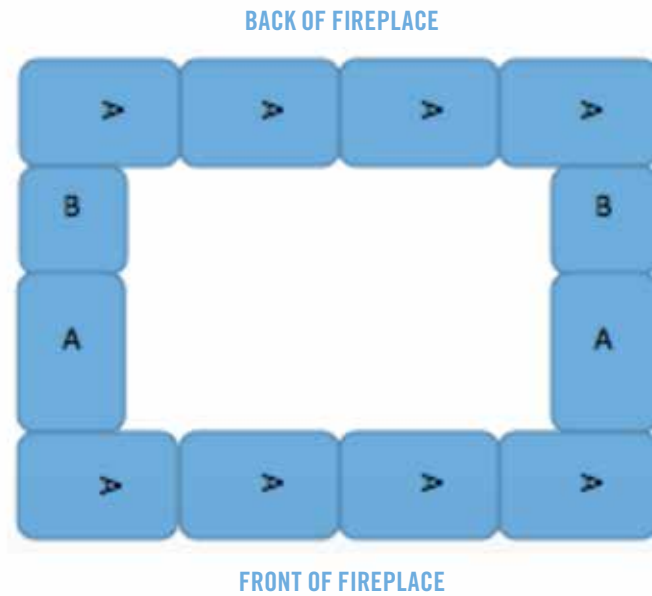


COURSE 19

Repeats Course 17

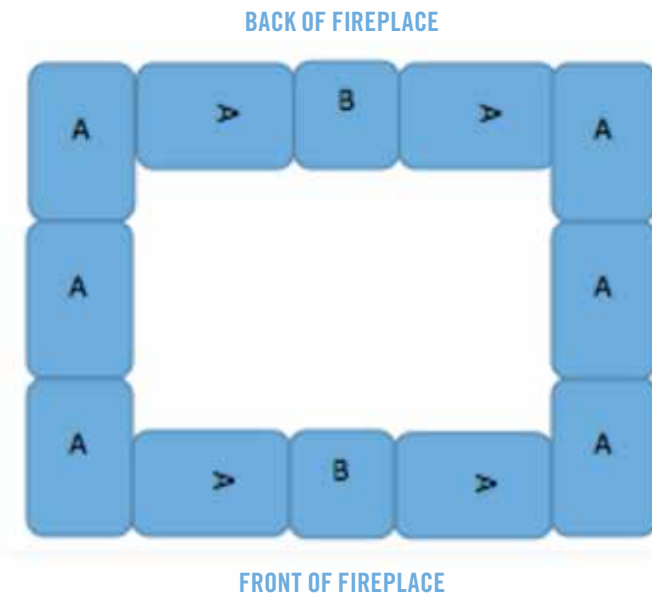


COURSE 20

Repeats Course 18

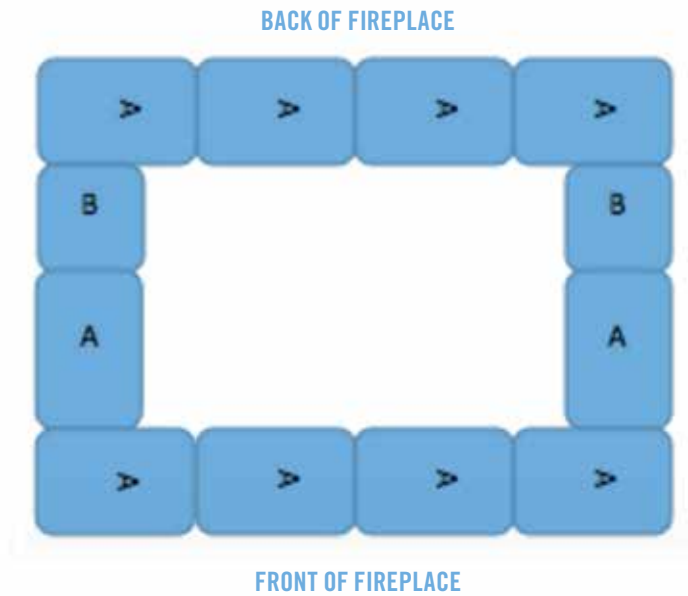

COURSE 21

Repeats Course 17

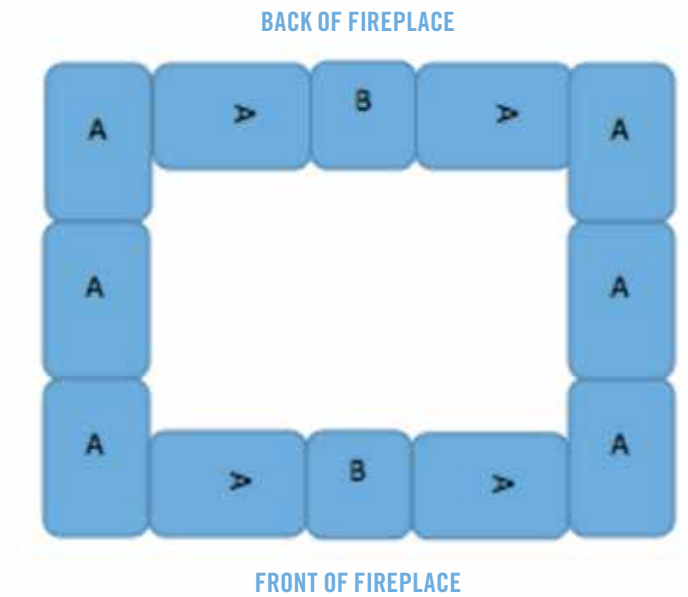


COURSE 22

Please note — See page 19 for CopingStone instructions.


Lay SteepleCrest Cap as shown below. The overhang should be about 2 inches on all sides. It is recommended to lay all SteepleCrest Caps to ensure proper placement before applying adhesive. Adhesive is required on this course.

- (8) 14 x 12 Full Pieces
- (2) 12 x 12 Cut Pieces #4

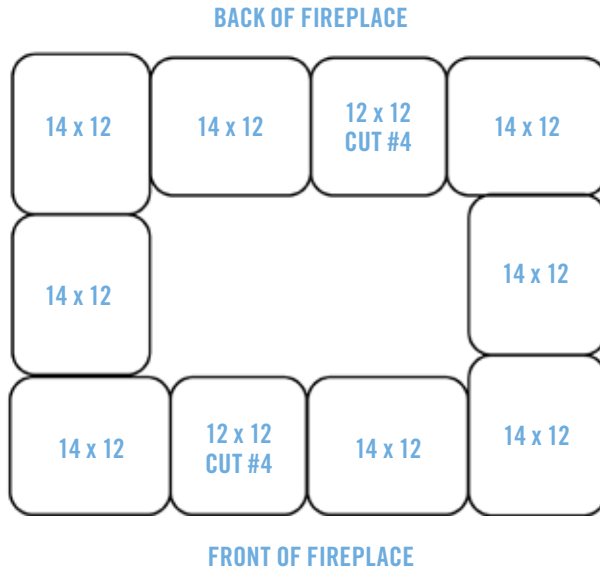


COURSE 23

This course will be smaller than the previous course. Center it on top of the SteepleCrest Cap.

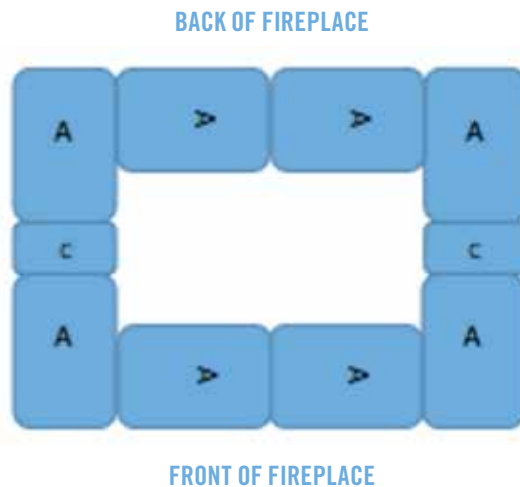


COURSE 24

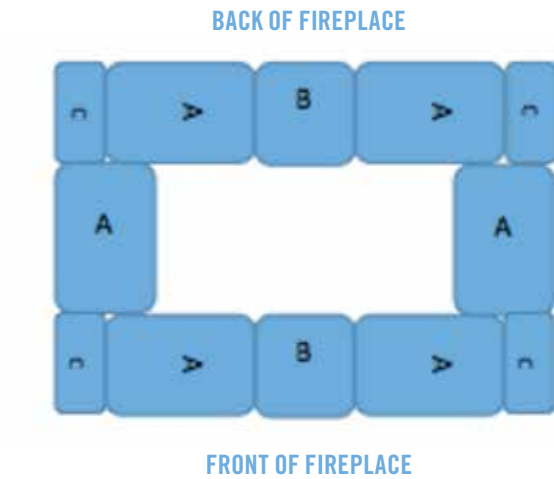

COURSE 25


Lay the blocks so they are spaced evenly on all sides. It is recommended to lay all the block to ensure proper placement before applying adhesive. Adhesive is required on this course.

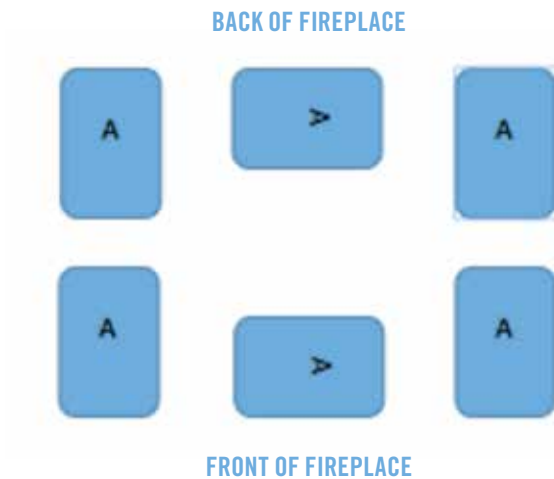

COURSE 26 (FINAL COURSE)

It is recommended to lay all the block to ensure proper placement before applying adhesive. Adhesive is required on this course.

BACK OF FIREPLACE

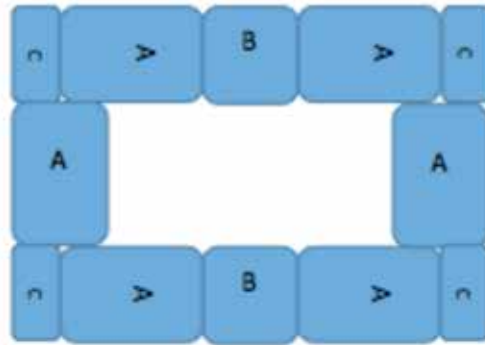

FRONT OF FIREPLACE

Congratulations! Enjoy your Eagle Bay Fireplace!



TRADITIONAL FIREPLACE WITH COPINGSTONE INSTALLATION INSTRUCTIONS

PIECES INCLUDED IN KIT

from Page 2 of original manual

***Please note** — the dimensions listed below are approximate (have been rounded up/down) and may vary by a few fractions of an inch.

COPINGSTONES (unlabeled)

- (15) 9 x 12 Full Pieces
- (14) 9 x 12 Cut Pieces
- (20) 9 x 9 Triangles
- (4) 6 x 12 Cut Pieces
- (2) 6 x 12 Full Pieces

COURSE 3 (COPINGSTONE)

from Page 5 of original manual

Lay the CopingStone in front of the Fire Brick as shown below. The overhang on the front of the fireplace should be about 1.5 inches. Adhesive is required on this course.

- (3) 9 x 12 Full Pieces
- (2) 9 x 12 Cut Pieces
- (4) 9 x 9 Triangles
- (2) 2.75 x 12 Full Pieces




TRADITIONAL FIREPLACE WITH COPINGSTONE INSTALLATION INSTRUCTIONS

COURSE 12 (COPINGSTONE)

from Page 10 of original manual

Lay CopingStone as shown below. The overhang should be about 1.5 inches on all sides. It is recommended to lay all CopingStone to ensure proper placement before applying adhesive. Adhesive is required on this course.

- (8) 9 x 12 Full Pieces
- (8) 9 x 12 Cut Pieces
- (8) 9 x 9 Triangles

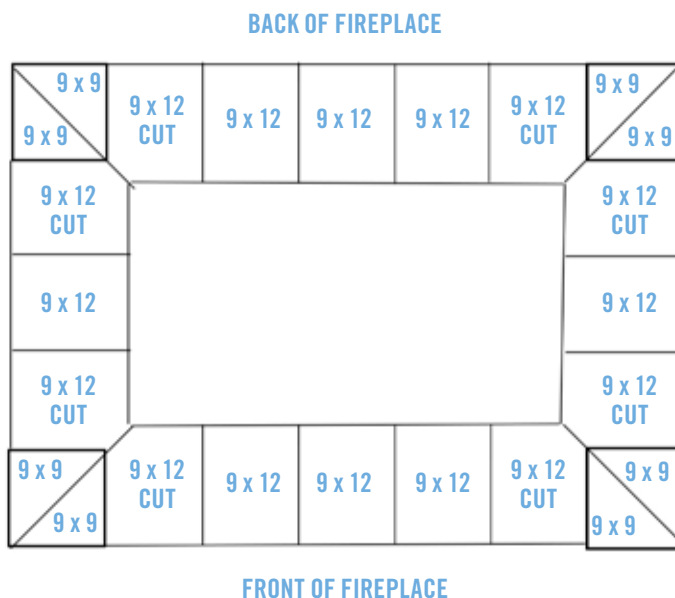


COURSE 22 (COPINGSTONE)

from Page 15 of original manual

Lay CopingStone as shown below. The overhang should be about 1.5 inches on all sides. It is recommended to lay all CopingStone to ensure proper placement before applying adhesive. Adhesive is required on this course.

- (4) 9 x 12 Full Pieces
- (4) 9 x 12 Cut Pieces
- (8) 9 x 9 Triangles
- (4) 6 x 12 Full Pieces
- (4) 6 x 12 Cut Pieces

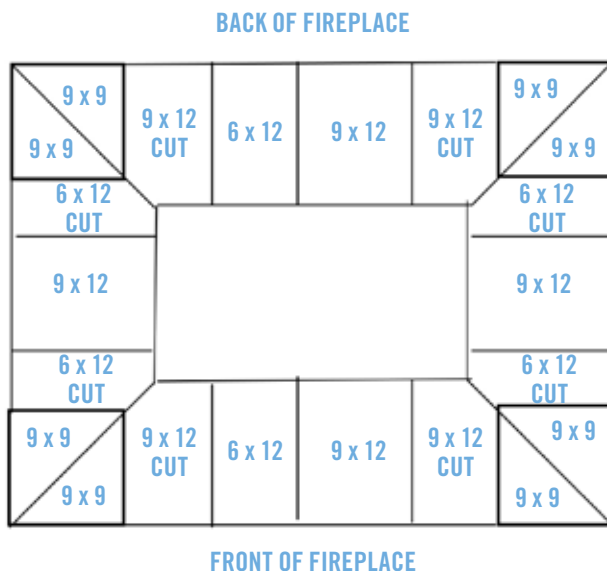

Hardscapes for Easy Living[™]

E EAGLE BAY[®]

Our goal is to make this process as easy as possible. Once you have an idea or vision in place, visit eaglebaypavers.com to look up a local dealer or to request a project consultation from an Eagle Bay representative. By contacting your local dealer, you'll be able to view product samples, compare product costs, and learn about qualified designers, contractors, and installers in your area.

TOLL FREE 800.321.9141

EAGLE BAY HARDSCAPE PRODUCTS, 1231 WILLIS ROAD, RICHMOND, VIRGINIA 23237

Browse our website to see additional information and photo galleries of our products at:

WWW.EAGLEBAYPAVERS.COM



Eagle Bay is a registered trademark of Allied Concrete Products. Allied Concrete Products is a licensed manufacturer of Anchor Wall Systems, Inc. The Anchor Build Something Beautiful logo, Aspen Stone[®], Diamond[®] 10DS, Diamond Pro[®], Diamond Pro Stone Cut[®], Highland Stone[®], XL[™] Cap are trademarks of Anchor Wall Systems, Inc.

©2017, Eagle Bay Inc. All Rights Reserved.