


Paint, Tar and Rubber Remover

for Pavers and Slabs

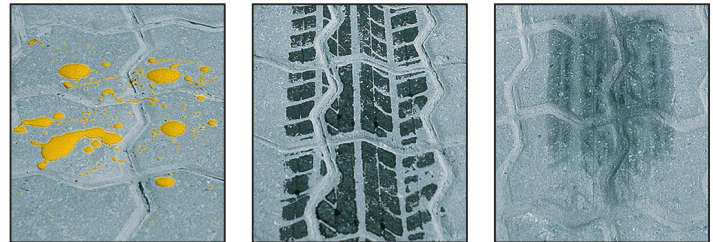

UPDATE

July 30, 2008

Make sure that you have an up-to-date technical data sheet in hand by consulting our Web site: techniseal.com

U.S.A. and Canada: dial 1 800 465-7325

Others: dial (514) 523-8324 (Canada)

APPLICATIONS

- Pavers and slabs made of concrete or natural stone, masonry, etc.
- Driveways, pool decks, patios, terraces, commercial parking lots, pedestrian areas, etc.

PROPERTIES

- Removes sealant, paint, tar or bitumen, rubber and chewing gum

DESCRIPTION

TECHNISEAL PAINT, TAR AND RUBBER REMOVER FOR PAVERS AND SLABS effectively dissolves sealant, paint, tar or bitumen, rubber and chewing gum on pavers, slabs, concrete and masonry. Dibasic-ester-based, it works and evaporates slowly, making stripping of large surfaces much easier, especially when the ground is hot. Its emulsifying additives make it easy to rinse with a pressure washer.

DIRECTIONS

Wear adequate protective clothing. **To ensure the results will meet your expectations, it is advisable to test the product on a small hidden area. Do not thin or dilute.**

Stains:

Surface should, ideally, be warm to the touch (morning). Cover stain generously with REMOVER; let work for 5 to 10 minutes. Reapply product and, using a SMALL TECHNISEAL BRUSH, scrub until stain is dissolved. Do not let dry; rinse immediately.

Note: This product dissolves any sealant; apply a new coat of sealant on stripped surface.

Stripping of large surfaces:

Wear metal-studded shoes (golf). Start application at the bottom of the slope. Strip one 200 sq. ft. section at a time. Apply a generous coat of REMOVER using a roller for rough surfaces. Solvent based sealant: Let work REMOVER for approximately 10 minutes. Water based acrylic sealant: Let work for 45 to 60 minutes. Take care not to let the product dry. Should the REMOVER dry, apply a new coat. For rinsing, it is very important to use a pressure washer

(minimum flow: 8 gallons/min., pressure: 1,500 to 3,000 PSI , jet angle: 30 to 45). Keeping the nozzle close to the surface (6 in.) and directing it towards the bottom of the hill, thoroughly rinse every square inch of the section going backwards, from the bottom to the top of the hill. Take care not to splash the part yet to be rinsed behind you, for water neutralizes the effect of REMOVER. Let dry. Repeat if necessary.

COVERAGE

0.7 to 1 quart per 10.75 sq. ft. The quantity required depends on the porosity of the material to be treated. It is recommended that a small area be tested to determine the exact amount needed.

STORAGE and SHELF LIFE

Product must be kept in its original, unopened and tightly sealed container and stored in a dry and well ventilated place with controlled temperature (40°F to 75°F). Keep sheltered from weather and direct sunlight. Properly stored, the product's shelf life is 3 years following production (see date on packaging).

PACKAGING

Product Code	Retail Size	Pro Size	Units per box	Units per pallet
121-541	1 qt.	—	6	720
221-547	—	5 gal.	—	48

WARNING

CAUTION. COMBUSTIBLE. MAY CAUSE IRRITATION. **CONTAINS:** Aromatic petroleum solvent. Avoid contact with eyes, skin and clothing. Keep away from heat and flame. **KEEP OUT OF REACH OF CHILDREN.**

FOR MORE INFORMATION, CONSULT THE MATERIAL SAFETY DATA SHEET.

SHIPPING

Land and sea

NOT REGULATED

Packing Group: III
(Flash Point > 100°F)

Small means of containment: ≤ 100 gal.

LIMITED WARRANTY

Since it has no control over surface preparation and product application, Techniseal can not guarantee the results. Techniseal warranty is limited to the replacement of product proven defective. A proof of purchase will be required for any claim. Note: User should have an up-to-date technical data sheet handy (techniseal.com) and make sure that this product meets his or her needs by carrying out a test under anticipated conditions of use.